

Solutions Manual for Starting Out with C++ from Control Structures to Objects 10th Gaddis

SOLUTIONS MANUAL SAMPLE PREVIEW

PUBLISHER

Pearson

COPYRIGHT

2021

ISBN

9780135928141

RESOURCE TYPE

Solutions Manual

Chapter 1 Solutions

Checkpoint 1.1-1

Why can computers do such a wide variety of things?

- A) Because they contain hardware.
- B) Because they can be programmed.
- C) Because they are part of our everyday lives.
- D) Because they use the same software.

Answer: B

Checkpoint 1.2-1

Internally, the CPU consists of what two units?

- A) Logic unit and the graphics processing unit (GPU)
- B) Main memory and secondary memory
- C) Control unit and the arithmetic and logic unit (ALU)
- D) Input unit and output unit

Answer: C

Checkpoint 1.2-2

Match each step of the fetch/decode/execute cycle with the correct description.

Decode	Execute	Fetch
The instruction is encoded in the form of a number. The control unit decodes the instruction and generates an electronic signal.	The signal is routed to the appropriate component of the computer (such as the ALU, a disk drive, or some other device). The signal causes the component to perform an operation.	The CPU's control unit fetches, from main memory, the next instruction in the sequence of program instructions.

Checkpoint 1.2-3

What amount of memory is enough to store a letter of the alphabet or a small number?

- A) A bit
- B) A byte
- C) A binary digit
- D) A megabyte

Answer: B

Checkpoint 1.2-4

What is a memory address?

- A) A unique number assigned to each section of memory.
- B) The part of the computer where memory is located.
- C) A partial section of secondary storage.
- D) A binary value assigned to each input device.

Answer: A

Checkpoint 1.2-5

A computer's secondary storage device loses its contents when power is removed from the computer, so main memory is needed to store data for long periods of time—even when there is no power to the computer.

True

False

Answer: False

Checkpoint 1.2-6

A(n) _____ device collects information from the outside world and sends it to the computer.

Correct answer: input

Incorrect answers:

- input
- output
- memory
- processing

Answer: input

Checkpoint 1.2-7

What are the two general categories of software?

- A) Desktop programs and Web browsers
- B) Utility programs and software development tools
- C) Operating systems and secondary systems
- D) System software and application software

Answer: D

Checkpoint 1.2-8

An operating system is a fundamental set of programs that control the internal operations of the computer's hardware.

True

False

Answer: True

Checkpoint 1.2-9

What do you call a program that performs a specialized task, such as a virus scanner, a file-compression program, or a data-backup program?

A) Security software

B) Utility program

C) Operating system

D) System software

Answer: B

Quiz 1.2 (Scored)

Question 1

When a program runs on a computer, the part of the computer that carries out the instructions is called the

CPU

GPU

RAM

ROM

Answer: CPU

Question 2

Monitors, printers, status lights are all examples of _____ devices.

input

primary

output

Answer:

output

Question 3

A bit is

- a metallic rod inserted into a horse's mouth to control it while riding.
- an alternative term for byte.
- a binary digit, like 0 or 1.
- an electronic device used in computers.

Answer:

a binary digit, like 0 or 1.

Question 4

A byte in memory is identified by a unique number called its _____. In modern computer systems, a byte consists of _____ bits.

- address, 8
- location, 32
- address, 16
- location, 16

Answer:

address, 8

Checkpoint 1.3-1

An algorithm is a set of well-defined steps for performing a task or solving a problem.

- True
- False

Answer: True

Checkpoint 1.3-2

Why were computer programming languages invented?

- A) to speed up the computer's processor
- B) to prove mathematical theories
- C) to ease the task of programming
- D) to preserve the use of machine language

Answer: C

Checkpoint 1.3-3

Humans can generally understand low-level languages easier than high-level languages.

Answer: False

Checkpoint 1.3-4

What term means that a C++ program can be written on one type of computer and then run on many other types of systems?

- A) Portability
- B) Utility
- C) Reusability
- D) Versatility

Answer: A

Checkpoint 1.3-5

The _____ steps through the preprocessed source code, translating each source code instruction into the appropriate machine language instruction.

Answer: compiler

Checkpoint 1.3-6

A(n) _____ file contains the statements written by the programmer.

Answer: source

Checkpoint 1.3-7

Which of the following consists of a text editor, compiler, debugger, and other utilities integrated into a package with a single set of menus?

- A) Machine environment
- B) Programming utility
- C) Integrated development environment
- D) Source code editor

Answer: C

Quiz 1.3 (Scored)

Question 1

A binary digit

is zero or one.

is either positive or negative.

requires one byte of storage.

is 2.

is none of the above.

Answer:

is zero or one

Question 2

The code that a programmer writes is called _____ code.

output
exe
object
source

Answer:

source

Question 3

Compilers translate the instructions written by the programmer into _____ code.

source
header
object
output

Answer:

object

Checkpoint 1.4-1

In C++, key words are always written in lowercase letters.

True
False

Answer: True

Checkpoint 1.4-2

A(n) _____ performs operations on pieces of data known as operands.

Answer: operator

Checkpoint 1.4-3

A C++ programming statement can be written across multiple lines.

True
False

Answer: True

Checkpoint 1.4-4

The information stored in these may change while the program is running.

- A) Variables
- B) Statements
- C) Key words
- D) Punctuation symbols

Answer: A

Checkpoint 1.4-5

What happens to a variable's current contents when a new value is stored there?

- A) The new value will take the place of the variable's current contents.
- B) The variable's current contents will remain unchanged.
- C) The variable's current contents are changed to zero.
- D) An error will occur. A variable's contents cannot be changed.

Answer: A

Checkpoint 1.4-6

In C++, all variables must be defined before they can be used.

- True
- False

Answer: True

Checkpoint 1.4-7

A variable definition specifies:

- A) the address of the variable in memory
- B) the amount of time that the variable will exist in memory
- C) the type of data that the variable will be used to store
- D) all of the above

Answer: C

Quiz 1.4 (Scored)

Question 1

The rules that govern the correct order and usage of the elements of a language are called the _____ of the language.

method
syntax
format
form

Answer: syntax

Question 2

Words that have a special meaning in a programming language are called _____.

key words
special words
format words
programming words

Answer: key words

Question 3

A location in memory used for storing data and given a name in a computer program is called a _____ because the data in the location can be changed.

changeable location
constant
reserved location
variable

Answer: variable

Question 4

Before a variable is used it must be

A) evaluated
B) assigned
C) defined, or declared
D) included

Answer: defined, or declared

Checkpoint 1.5-1

What are the three primary activities of a program?

- A) design, compile, debug
- B) preprocessing, compiling, linking
- C) decode, execute, fetch
- D) input, processing, and output

Answer: D

Checkpoint 1.6-1

What four items should you identify when defining what a program is to do?

- A) design, compile, debug, repeat
- B) purpose, input, process, output
- C) variables, logic, input, output
- D) flowchart, compile, process, output

Answer: B

Checkpoint 1.6-2

What is a run-time error?

- A) an error that occurs while the program is compiling
- B) an error that occurs while the program is running
- C) an error that occurs after the program runs
- D) a serious error that occurs within the operating system

Answer: B

Checkpoint 1.6-3

A syntax error (such as misspelling a key word) is found when the program is running.

True

False

Answer: False

Quiz 1.6 (Scored)

Question 1

An error in a program that involves a violation of language rules will be detected at _____ time.

- A) save
 - B) compile
 - C) run
 - D) space
- Answer:** compile

Question 2

Division by zero when the program is executing is an example of a _____ error.

- compiler
- runtime
- both
- neither

Answer: runtime

1

Introduction to Programming
and the Translation Process

PURPOSE

1. To become familiar with the login process and the C++ environment used in the lab
2. To understand the basics of program design and algorithm development
3. To learn, recognize and correct the three types of computer errors:
 - syntax errors
 - run time errors
 - logic errors
4. To learn the basics of an editor and compiler and be able to compile and run existing programs
5. To enter code and run a simple program from scratch

PROCEDURE

1. Students should read the Pre-lab Reading Assignment before coming to lab.
2. Students should complete the Pre-lab Writing Assignment before coming to lab.
3. In the lab, students should complete Labs 1.1 through 1.4 in sequence. Your instructor will give further instructions as to grading and completion of the lab.

Contents	Pre-requisites	Approximate completion time	Page number	Check when done
Pre-lab Reading Assignment		20 min.	2	
Pre-lab Writing Assignment	Pre-lab reading	10 min.	6	
Lesson 1A				
Lab 1.1 Opening, Compiling and Running Your First Program	Pre-lab reading	20 min. (Including overview of local system)	7	
Lab 1.2 Compiling a Program with a Syntax Error	Familiarity with the environment Finished Lab 1.1	15 min.	7	

continues

Lab 1.3 Running a Program with a Run Time Error	Understanding of the three types of errors	15 min.	8
Lesson 1B			
Lab 1.4 Working with Logic Errors	Understanding of logic errors	15 min.	9
Lab 1.5 Writing Your First Program	Finished Labs 1.1 through 1.4	30 min.	11

PRE-LABREADING ASSIGNMENT

Computer Systems

A **computer system** consists of all the components (hardware and software) used to execute the desires of the computer user. **Hardware** is the electronic physical components that can retrieve, process and store data. It is generally broken down into five basic components:

Central Processing Unit (C.P.U.)	This is the unit where programs are executed. It consists of the control unit , which oversees the overall operation of program execution and the A.L.U. (Arithmetic/Logic Unit), which performs the mathematical and comparison operations.
Main Memory	The area where programs and data are stored for use by the CPU
Secondary Storage	The area where programs and data are filed (stored) for use at a later time
Input Devices	The devices used to get programs and data into the computer (e.g., a keyboard)
Output Devices	The devices used to get programs and data from the computer (e.g., a printer)

Software consists of a sequence of instructions given to perform some pre-defined task. These labs concentrate on the software portion of a computer system.

Introduction to Programming

A **computer program** is a series of instructions written in some computer language that performs a particular task. Many times beginning students concentrate solely on the language code; however, quality software is accomplished only after careful design that identifies the needs, data, process and anticipated outcomes. For this reason it is critical that students learn good design techniques before attempting to produce a quality program. Design is guided by an **algorithm**, which is a plan of attacking some problem. An algorithm is used for many aspects of tasks, whether a recipe for a cake, a guide to study for an exam or the specifications of a rocket engine.

Problem example: Develop an algorithm to find the average of five test grades.

An algorithm usually begins with a general broad statement of the problem.

Find the average of Five Test Grades

From here we can further refine the statement by listing commands that will accomplish our goal.

Read in the Grades

Find the Average

Write out the Average

Each box (called a node) may or may not be refined further depending on its clarity to the user. For example: **Find the Average** may be as refined as an experienced programmer needs to accomplish the task of finding an average; however, students learning how to compute averages for the first time may need more refinement about how to accomplish the goal. This refinement process continues until we have a listing of steps understandable to the user to accomplish the task. For example, **Find the Average** may be refined into the following two nodes.

Total=sum of 5 grades

Average=Total/5

Starting from left to right, a node that has no refinement becomes part of the algorithm. The actual algorithm (steps in solving the above program) is listed in bold.

Find the Average of Five Test Grades

Read in the Grades

Find the Average

Total = sum of 5 grades

Average = Total / 5

Write Out the Average

From this algorithm, a program can be written in C++.

Translation Process

Computers are strange in that they only understand a sequence of 1s and 0s. The following looks like nonsense to us but, in fact, is how the computer reads and executes everything that it does:

10010001111010101110010001110001000

Because computers only use two numbers (1 and 0), this is called **binary** code. can imagine how complicated programming would be if we had to learn this very complex language. That, in fact, was how programming was done many years ago; however, today we are fortunate to have what are called **high level languages** such as C++. These languages are geared more for human understanding and thus make the task of programming much easier. However, since the computer only understands low level binary code (often called machine code), there must be a translation process to convert these high level languages to machine code. This is often done by a **compiler**, which is a software package that translates high level

languages into machine code. Without it we could not run our programs. The figure below illustrates the role of the compiler.



The compiler translates source code into object code. The type of code is often reflected in the extension name of the file where it is located.

Example: We will write source (high level language) code in C++ and all our file names will end with `.cpp`, such as:

```
firstprogram.cpp    secondprogram.cpp
```

When those programs are compiled, a new file (object file) will be created that ends with `.obj`, such as:

```
firstprogram.obj    secondprogram.obj
```

The compiler also catches grammatical errors called **syntax errors** in the source code. Just like English, all computer languages have their own set of grammar rules that have to be obeyed. If we turned in a paper with a proper name (like John) not capitalized, we would be called to task by our teacher, and probably made to correct the mistake. The compiler does the same thing. If we have something that violates the grammatical rules of the language, the compiler will give us error messages. These have to be corrected and a grammar error free program must be submitted to the compiler before it translates the source code into machine language. In C++, for example, instructions end with a semicolon. The following would indicate a syntax error:

```
cout << "Hi there" << endl
```


Since there is no semicolon at the end, the compiler would indicate an error, which must be corrected as follows:

```
cout << "Hi there" << endl;
```

After the compile process is completed, the computer must do one more thing before we have a copy of the machine code that is ready to be executed. Most programs are not entirely complete in and of themselves. They need other modules previously written that perform certain operations such as data input and output. Our programs need these attachments in order to run. This is the function of the **linking process**. Suppose you are writing a term paper on whales and would like a few library articles attached to your report. You would go to the library, get a copy of the articles (assuming it would be legal to do so), and attach them to your paper before turning it in. The **linker** does this to your program. It goes to a “software library” of programs and attaches the appropriate code to your program. This produces what is called the executable code, generated in a file that often ends with `.exe`.

Example: `firstprogram.exe` `secondprogram.exe`

The following figure summarizes the translation process:

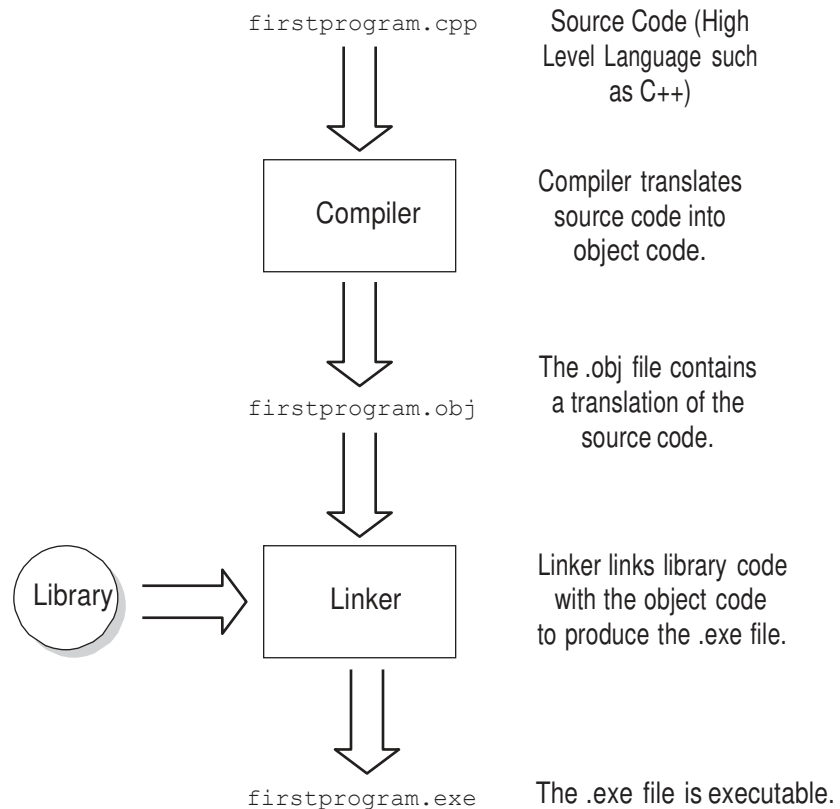

Once we have the executable code, the program is ready to be run. Hopefully it will run correctly and everything will be fine; however that is not always the case. During “run time”, we may encounter a second kind of error called a **run time error**. This error occurs when we ask the computer to do something it cannot do. Look at the following sentence:

You are required to swim from Naples, Italy to New York in five minutes.


Although this statement is grammatically correct, it is asking someone to do the impossible. Just as we cannot break the laws of nature, the computer cannot violate the laws of mathematics and other binding restrictions. Asking the computer to divide by 0 is an example of a run time error. We get executable code; however, when the program tries to execute the command to divide by 0, the program will stop with a run time error. Run time errors, particularly in C++, are usually more challenging to find than syntax errors.

Once we run our program and get neither syntax nor run time errors, are we free to rejoice? Not exactly. Unfortunately, it is now that we may encounter the worst type of error: the dreaded **Logic error**. Whenever we ask the computer to do something, but mean for it to do something else, we have a logic error. Just as there needs to be a “meeting of the minds” between two people for meaningful communication to take place, there must be precise and clear instructions that generate our intentions to the computer. The computer only does what we ask it to do. It does not read our minds or our intentions! If we ask a group of people to cut down the tree when we really meant for them to trim the bush, we have a communication problem. They will do what we ask, but what we asked and what we wanted are two different things. The same is true for the computer. Asking it to multiply by 3 when we want something doubled is an example of a

logic error. Logic errors are the most difficult to find and correct because there are no error messages to help us locate the problem. A great deal of programming time is spent on solving logic errors.

Integrated Environments

An integrated development environment (IDE) is a software package that bundles an editor (used to write programs), a compiler (that translates programs) and a run time component into one system. For example, the figure below shows a screen from the Microsoft Visual Studio integrated environment.

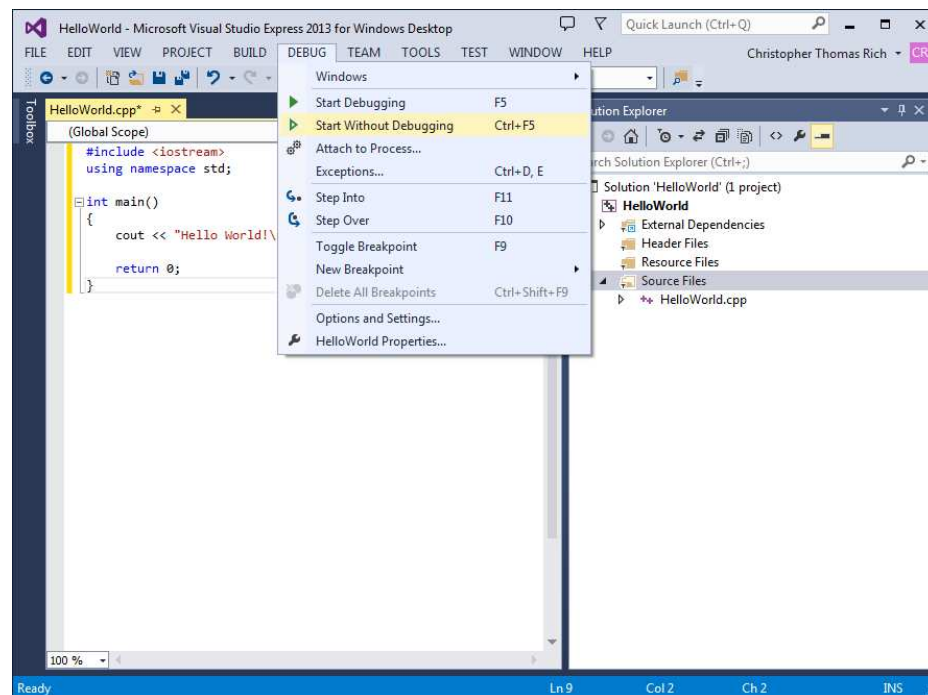

Other systems may have these components separate which makes the process of running a program a little more difficult. You should also be aware of which Operating System you are using. An **Operating System** is the most important software on your computer. It is the “grand master” of programs that interfaces the computer with your requests. Your instructor will explain your particular system and C++ environment so that you will be able to develop, compile and run C++ programs on it.

PRE-LAB WRITING ASSIGNMENT

Fill-in-the-Blank Questions

1. Compilers detect _____ errors.
2. Usually the most difficult errors to correct are the _____ errors, since they are not detected in the compilation process.
3. Attaching other pre-written routines to your program is done by the _____ process.
4. _____ code is the machine code consisting of ones and zeroes that is read by the computer.
5. Dividing by zero is an example of a _____ error.

Learn the Environment That You Are Working In

The following information may be obtained from your instructor.

1. What operating system are you using?
2. What C++ environment are you working in?
3. If you are not working in an integrated environment, what are the compile, run and edit commands that you will need?

LESSON1A

Your instructor may assign either Appendix A or Appendix B depending on your environment. Appendix A is for labs using Visual Studio and Appendix B is for labs using Linux or UNIX. If you are using an environment other than these, your instructor will give you instructions for this first lesson and ask you to complete Lab 1.1 below.

LAB 1.1 Opening, Compiling and Running Your First Program

Exercise 1: Logon to your system based on your professor's instructions.

Exercise 2: Bring in the `firstprog.cpp` program from the Lab 1 folder.

Exercise 3: Compile the program.

Exercise 4: Run the program and write what is printed on the screen.

The code of `firstprog.cpp` is as follows:

```
// This is the first program that just writes out a simple message
// Place your name here

#include <iostream>                // needed to perform C++ I/O
using namespace std;

int main ()

{

    cout << "Now is the time for all good men" << endl;
    cout << "To come to the aid of their party" << endl;

    return 0;

}
```

LAB 1.2 Compiling a Program with a Syntax Error

Exercise 1: Bring in program `semiprob.cpp` from the Lab 1 folder.

Exercise 2: Compile the program. Here we have our first example of the many syntax errors that you no doubt will encounter in this course. The error message you receive may be different depending on the system you are using, but the compiler insists that a semicolon is missing somewhere. Unfortunately, where the message indicates that the problem exists, and where the problem actually occurs may be two different places. To correct

the problem place a semicolon after the line `cout << "Today is a great day for Lab".`

Most syntax errors are not as easy to spot and correct as this one.

Exercise 3: Re-compile the program and when you have no syntax errors, run the program and input 9 when asked. Record the output.

Exercise 4: Try running it with different numbers. Record your output.

Do you feel you are getting valid output?

The code of `semiprob.cpp` is as follows:

```
// This program demonstrates a compile error.

// Place your name here

#include <iostream>
using namespace std;

int main()
{
    int number;
    float total;

    cout << "Today is a great day for Lab"
    cout << endl << "Let's start off by typing a number of your choice" << endl;
    cin >> number;

    total = number * 2;
    cout << total << " is twice the number you typed" << endl;

    return 0;
}
```

LAB 1.3 Running a Program with a Run Time Error

Exercise 1: Bring in program `runprob.cpp` from the Lab 1 folder.

Exercise 2: Compile the program. You should get no syntax errors.

Exercise 3: Run the program. You should now see the first of several run time errors. There was no syntax or grammatical error in the program; however, just like commanding someone to break a law of nature, the program is asking the computer to break a law of math by dividing by zero. It cannot be done. On some installations, you may see this as output that looks very strange. Correct this program by having the code divide by 2 instead of 0.

Exercise 4: Re-compile and run the program. Type 9 when asked for input. Record what is printed.

Exercise 5: Run the program using different values. Record the output.

Do you feel that you are getting valid output?

The code of `runprob.cpp` is as follows:

```
// This program will take a number and divide it by 2.

// Place your name here

#include <iostream>
using namespace std;

int main()
{
    float number;
    int divider;

    divider = 0;

    cout << "Hi there" << endl;
    cout << "Please input a number and then hit return" << endl;
    cin >> number;

    number = number / divider;

    cout << "Half of your number is " << number << endl;

    return 0;
}
```

LESSON1B

LAB 1.4 Working with Logic Errors

Exercise 1: Bring in program `logicprob.cpp` from the Lab 1 folder. The code follows.

```
// This program takes two values from the user and then swaps them
// before printing the values. The user will be prompted to enter
// both numbers.

// Place your name here

#include <iostream>
using namespace std;
```

continues

```
int main()

{

    float firstNumber;
    float secondNumber;

    // Prompt user to enter the first number.

    cout << "Enter the first number" << endl;
    cout << "Then hit enter" << endl;
    cin >> firstNumber;

    // Prompt user to enter the second number.

    cout << "Enter the second number" << endl;
    cout << "Then hit enter" << endl;
    cin >> secondNumber;

    // Echo print the input.

    cout << endl << "You input the numbers as " << firstNumber
        << " and " << secondNumber << endl;

    // Now we will swap the values.

    firstNumber = secondNumber;
    secondNumber = firstNumber;

    // Output the values.

    cout << "After swapping, the values of the two numbers are "
        << firstNumber << " and " << secondNumber << endl;

    return 0;

}
```

Exercise 2: Compile this program. You should get no syntax errors.

Exercise 3: Run the program. What is printed?

Exercise 4: This program has no syntax or run time errors, but it certainly has a logic error. This logic error may not be easy to find. Most logic errors create a challenge for the programmer. Your instructor may ask you not to worry about finding and correcting the problem at this time.

LAB 1.5 Writing Your First Program (Optional)

Exercise 1: Develop a design that leads to an algorithm and a program that will read in a number that represents the number of kilometers traveled. The output will convert this number to miles. 1 kilometer = 0.621 miles. Call this program `kilotomiles.cpp`.

Exercise 2: Compile the program. If you get compile errors, try to fix them and recompile until your program is free of syntax errors.

Exercise 3: Run the program. Is your output what you expect from the input you gave? If not, try to find and correct the logic error and run the program again. Continue this process until you have a program that produces the correct result.

